





Model 489-6D Counter / Timer

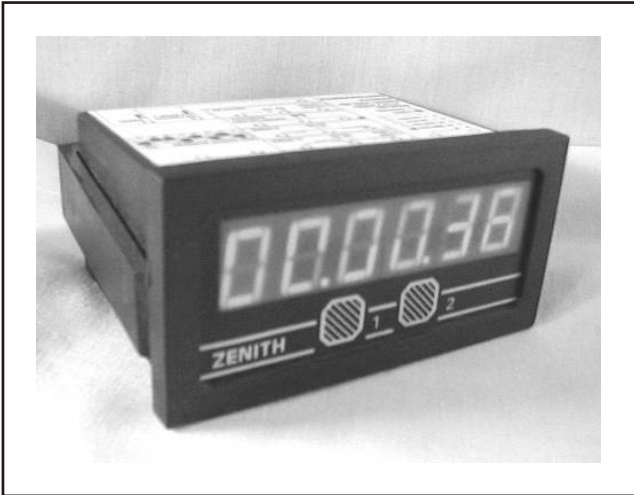

TIMER / COUNTER	
DIPSWITCH	1 2 3 4 5 6 7 8
TIMER	x x x x x x x 1
COUNTER	x x x x x x x 0

'1' = on '0' = off 'x' = dont care

COUNTER OPTIONS	
DIPSWITCH	1 2 3 4 5 6 7 8
HIGH SPEED	x x x x x x 1 x
LOW SPEED	x x x x x x 0 x
COUNT / 1	0 0 0 0 0 0 X 0
COUNT / 2	1 0 0 0 0 0 X 0
COUNT / 3	0 1 0 0 0 0 X 0
COUNT / 4	1 1 0 0 0 0 X 0
.....	
COUNT / 63	0 1 1 1 1 1 X 0
COUNT / 64	1 1 1 1 1 1 X 0

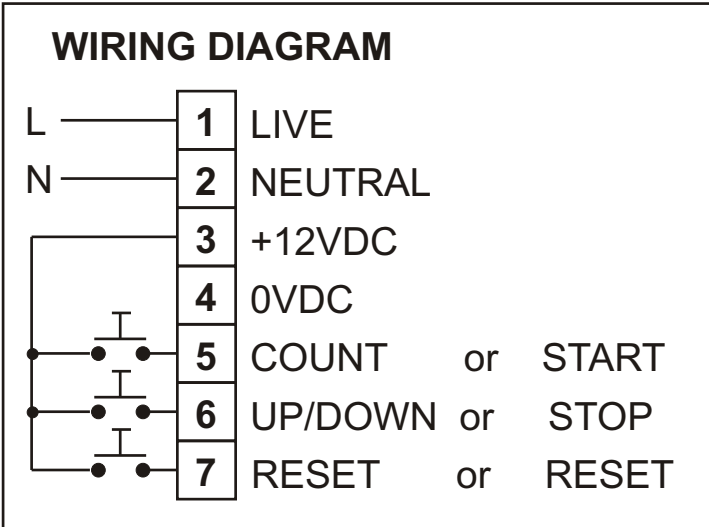

TIMER OPTIONS	
DIPSWITCH	1 2 3 4 5 6 7 8
[RUN/HOLD]	
[RESET]	x x x x 0 0 x 1
[START/STOP]	
[RESET]	x x x x 1 0 x 1
[START]	
[STOP]	
[RESET]	x x x x 0 1 x 1
SSS.SSS	0 0 0 0 x x x 1
SSSS.SS	1 0 0 0 x x x 1
SSSSS.S	0 1 0 0 x x x 1
MM:SS.SS	1 1 0 0 x x x 1
MMMM:SS	0 0 1 0 x x x 1
HH:MM:SS	1 0 1 0 x x x 1
HHHH:MM	0 1 1 0 x x x 1
HHHHH.H	1 1 1 0 x x x 1
HHHHHH	0 0 0 1 x x x 1

