





# Model 489-6D Counter / Timer

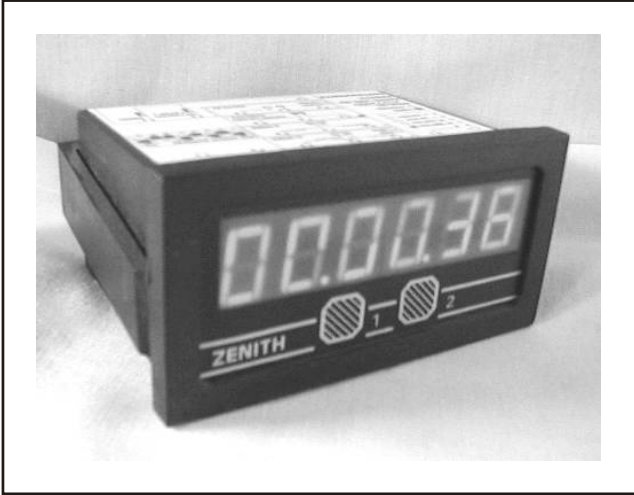

TIMER / COUNTER								
DIPSWITCH	1	2	3	4	5	6	7	8
TIMER	x	x	x	x	x	x	x	1
COUNTER	x	x	x	x	x	x	x	0

'1' = on '0' = off 'x' = dont care

COUNTER OPTIONS								
DIPSWITCH	1	2	3	4	5	6	7	8
HIGH SPEED	x	x	x	x	x	x	1	x
LOW SPEED	x	x	x	x	x	x	0	x
COUNT / 1	0	0	0	0	0	0	X	0
COUNT / 2	1	0	0	0	0	0	X	0
COUNT / 3	0	1	0	0	0	0	X	0
COUNT / 4	1	1	0	0	0	0	X	0
.....								
COUNT / 63	0	1	1	1	1	1	X	0
COUNT / 64	1	1	1	1	1	1	X	0

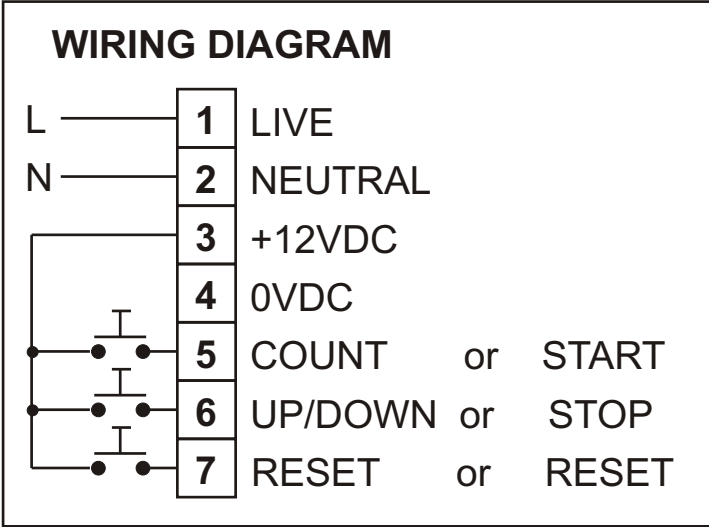

TIMER OPTIONS								
DIPSWITCH	1	2	3	4	5	6	7	8
[ RUN/HOLD ]								
[ RESET ]	x	x	x	x	0	0	x	1
[ START/STOP ]								
[ RESET ]	x	x	x	x	1	0	x	1
[ START ]								
[ STOP ]								
[ RESET ]	x	x	x	x	0	1	x	1
SSS.SSS	0	0	0	0	x	x	x	1
SSSS.SS	1	0	0	0	x	x	x	1
SSSSS.S	0	1	0	0	x	x	x	1
MM:SS.SS	1	1	0	0	x	x	x	1
MMMM:SS	0	0	1	0	x	x	x	1
HH:MM:SS	1	0	1	0	x	x	x	1
HHHH:MM	0	1	1	0	x	x	x	1
HHHHH.H	1	1	1	0	x	x	x	1
HHHHHH	0	0	0	1	x	x	x	1

